LXHPEM LED High Performance Emergency Thermoplastic Unit

Project:	
Type:	
Catalog #:	

STANDARD

ILLUMINATION

- *Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 3-ft path of egress at 7-1/2-ft mounting height.*
- *High performance chrome-plated metallized reflector and plastic lens.*
- *5.0 watt (12 LEDs x 0.42 watt) per head.*

ELECTRICAL

- *Universal 120-277 voltage.*
- *Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *9.6V long-life, maintenance-free, rechargeable lithium iron phosphate battery.*
- *Remote capacity of 3.0 watts standard.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Universal knockout pattern on back plate for surface mount.*
- *Knockouts provided for conduit feed applications.*
- *Suitable for wall or ceiling mount.*

HOUSING

- *Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.*

WARRANTY / LISTING

- *Five-year warranty on all electronics and housing. Battery prorated for five years.*
- *Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations (0°C – 50°C).*
- *Certified to CEC under title 20 regulations.*

DIMENSIONS

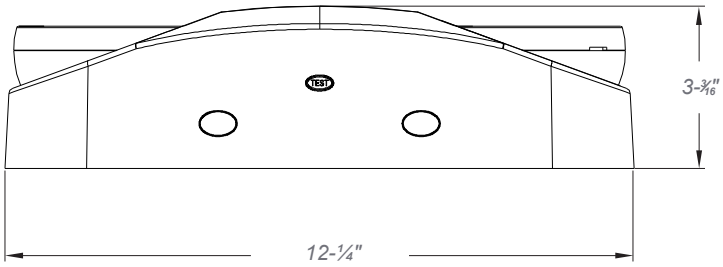



ORDERING INFORMATION

Sample Part Number: ***LXHPEMW***

MODEL	HOUSING COLOR	
LXHPEM	*W*	*White*
	B	*Black*

LumexLED • 1489 W 13th Street • Riviera Beach FL 33404 • (561) 863-3499 • Sales@LumexLED.com

Specifications and dimensions subject to change without notice